



双卡套直角接头



英制双卡套直角接头						
T-Tube O. D. (in.)	基本订购信息	尺寸mm				
		L	C	G	F	E
1/16	K1-VS	17.8	8.6	7.9	9.5	1.3
1/8	K2-VS	22.4	12.7	11.1	9.5	2.3
3/16	K3-VS	25.4	13.7	12.7	12.7	3.0
1/4	K4-VS	26.9	15.2	14.3	12.7	4.8
5/16	K5-VS	28.7	16.3	15.9	14.3	6.4
3/8	K6-VS	30.5	16.8	17.5	15.9	7.1
1/2	K8-VS	36.1	22.9	22.2	20.6	10.4
5/8	K10-VS	38.1	24.4	25.4	23.8	12.7
3/4	K12-VS	39.9	24.4	28.6	27.0	15.7
7/8	K14-VS	44.7	25.9	31.8	34.9	18.3
1	K16-VS	49.0	31.2	38.1	34.9	22.4
1 1/8	K18-VS	55.1	31.2	41.3	42.9	24.6
1 1/4	K20-VS	66.5	41.1	47.6	42.9	27.7
1 1/2	K24-VS	78.0	50.0	57.2	50.8	34.0

公制双卡套直角接头						
T-Tube O. D. (in.)	基本订购信息	尺寸mm				
		L	C	G	F	E
3	K03-VS	22.3	12.9	12	9.5	2.4
4	K04-VS	25.4	13.7	12	12.7	2.4
6	K06-VS	27.0	15.3	14	12.7	4.8
8	K08-VS	28.8	16.2	16	14.3	6.4
10	K010-VS	31.5	17.2	19	17.5	7.9
12	K012-VS	36.0	22.8	22	20.6	9.5
14	K014-VS	38.0	24.4	25	23.8	11.0
15	K015-VS	38.8	24.4	25	23.8	11.9
16	K016-VS	38.0	24.4	25	23.8	12.7
18	K018-VS	39.8	24.4	30	27.0	15.1
20	K020-VS	44.6	26.0	32	34.9	15.9
22	K022-VS	44.6	26.0	32	34.9	18.3
25	K025-VS	49.1	31.3	38	34.9	21.8
28	K028-VS	64.0	36.6	46	42.9	21.8
30	K030-VS	69.9	39.6	50	42.9	26.2
32	K032-VS	72.3	42.0	50	42.9	28.6
38	K038-VS	84.0	49.4	60	50.8	33.7


双卡套内螺纹直角接头

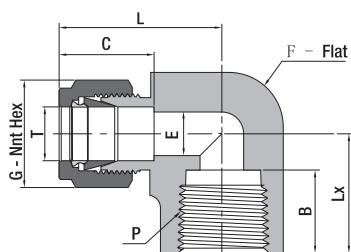

英制双卡套内螺纹直角接头			NPT 螺纹						
T-Tube O. D. (in.)	NPT 尺寸	基本订购信息	尺寸						
			L	B	C	G	E	F	Lx
1/16	1/16	K1F1-VS	18.0	9.9	8.6	7.9	1.3	11.1	14.2
1/16	1/8	K1F2-VS	20.6	10.4	8.6	7.9	1.3	14.3	19.1
1/8	1/8	K2F2-VS	24.6	10.4	12.7	11.1	2.3	14.3	19.1
1/8	1/4	K2F4-VS	27.4	15.0	12.7	11.1	2.3	17.5	22.4
3/16	1/8	K3F2-VS	25.4	10.4	13.7	12.7	3.0	12.7	19.1
1/4	1/8	K4F2-VS	26.9	10.4	15.2	14.3	4.8	14.3	19.1
1/4	1/4	K4F4-VS	29.7	15.0	15.2	14.3	4.8	17.5	22.4
1/4	3/8	K4F6-VS	31.8	15.0	15.2	14.3	4.8	20.6	22.4
1/4	1/2	K4F8-VS	34.5	19.8	15.2	14.3	4.8	25.4	28.4
5/16	1/8	K5F2-VS	28.7	10.4	16.3	15.9	6.4	14.3	19.1
5/16	1/4	K5F4-VS	30.5	15.0	16.3	15.9	6.4	17.5	22.4
3/8	1/8	K6F2-VS	30.5	10.4	16.8	17.5	7.1	15.9	19.1
3/8	1/4	K6F4-VS	31.2	15.0	16.8	17.5	7.1	17.5	22.4
3/8	3/8	K6F6-VS	33.3	15.0	16.8	17.5	7.1	20.6	22.4
3/8	1/2	K6F8-VS	36.1	19.8	16.8	17.5	7.1	25.4	28.4
1/2	1/4	K8F4-VS	36.1	15.0	22.9	22.2	10.4	20.6	22.4
1/2	3/8	K8F6-VS	36.1	15.0	22.9	22.2	10.4	20.6	22.4
1/2	1/2	K8F8-VS	38.9	19.8	22.9	22.2	10.4	25.4	28.4
5/8	3/8	K10F6-VS	38.1	15.0	24.4	25.4	12.7	23.8	22.4
5/8	1/2	K10F8-VS	39.9	19.8	24.4	25.4	12.7	27.0	28.4
3/4	1/2	K12F8-VS	39.9	19.8	24.4	28.6	15.7	27.0	28.4
3/4	3/4	K12F12-VS	44.7	20.6	24.4	28.6	15.7	34.9	31.8
7/8	3/4	K14F12-VS	44.7	20.6	25.9	31.8	18.3	34.9	31.8
1	3/4	K16F12-VS	49.0	20.6	31.2	38.1	22.4	34.9	31.8
1	1	K16F16-VS	53.6	25.4	31.2	38.1	22.4	42.9	38.1


公制双卡套内螺纹直角接头			NPT 螺纹						
T-Tube O. D. (in.)	NPT 尺寸	基本订购信息	尺寸mm						
			L	B	C	G	E	F	Lx
6	1/8	K06F2-VS	27.0	10.4	15.3	14	4.8	12.7	19.0
6	1/4	K06F4-VS	29.8	15.0	15.3	14	4.8	17.5	22.4
8	1/8	K08F2-VS	28.8	10.4	16.2	16	4.8	14.3	19.1
8	1/4	K08F4-VS	30.6	15.0	16.2	16	6.4	17.5	22.4
10	1/4	K010F4-VS	33.5	15.0	17.2	19	7.9	20.6	22.4
10	3/8	K010F6-VS	33.5	15.0	17.2	19	7.9	20.6	22.4
10	1/2	K010F8-VS	36.6	19.8	17.2	19	7.9	25.4	28.5
12	1/4	K012F4-VS	36.0	15.0	22.8	22	7.9	20.6	22.4
12	3/8	K012F6-VS	36.0	15.0	22.8	22	9.5	20.6	22.4
12	1/2	K012F8-VS	38.8	19.8	22.8	22	9.5	25.4	28.4
16	3/8	K016F6-VS	39.5	15.0	24.4	25	9.5	27.0	23.6
16	1/2	K016F8-VS	39.5	19.8	24.4	25	12.7	27.0	28.5

双卡套外螺纹直角接头



英制双卡套外螺纹直角接头			NPT 螺纹						
T-Tube O. D. (in.)	NPT 尺寸	基本订购信息	尺寸mm						
			L	C	G	F	E	B	Lx
1/16	1/16	K1M1-VS	19.1	8.6	7.9	11.1	1.3	9.7	17.8
1/16	1/8	K1M2-VS	19.1	8.6	7.9	11.1	1.3	9.7	17.8
1/8	1/16	K2M1-VS	23.6	12.7	11.1	11.1	2.4	9.7	17.8
1/8	1/8	K2M2-VS	23.6	12.7	11.1	11.1	2.4	9.7	17.8
1/8	1/4	K2M4-VS	24.6	12.7	11.1	12.7	2.4	14.2	23.4
3/16	1/8	K3M2-VS	25.4	13.7	12.7	12.7	3.0	9.7	18.8
3/16	1/4	K3M4-VS	25.4	13.7	12.7	12.7	3.0	14.2	23.4
1/4	1/16	K4M1-VS	26.9	15.2	14.3	12.7	3.0	9.7	18.8
1/4	1/8	K4M2-VS	26.9	15.2	14.3	12.7	4.8	9.7	18.8
1/4	1/4	K4M4-VS	26.9	15.2	14.3	12.7	4.8	14.2	23.4
1/4	3/8	K4M6-VS	29.7	15.2	14.3	17.5	4.8	14.2	26.2
1/4	1/2	K4M8-VS	31.8	15.2	14.3	20.6	4.8	19.1	33.0
5/16	1/8	K5M2-VS	28.7	16.3	15.9	14.3	4.8	9.7	19.8
5/16	1/4	K5M4-VS	28.7	16.3	15.9	14.3	6.4	14.2	24.4
5/16	3/8	K5M6-VS	30.5	16.3	15.9	17.5	6.4	14.2	26.2
3/8	1/8	K6M2-VS	30.5	16.8	17.5	15.9	4.8	9.7	20.8
3/8	1/4	K6M4-VS	30.5	16.8	17.5	15.9	7.1	14.2	25.4
3/8	3/8	K6M6-VS	31.2	16.8	17.5	17.5	7.1	14.2	26.2
3/8	1/2	K6M8-VS	33.3	16.8	17.5	20.6	7.1	19.1	33.0
3/8	3/4	K6M12-VS	37.1	16.8	17.5	27.0	7.1	19.1	36.8
1/2	1/4	K8M4-VS	36.1	22.9	22.2	20.6	7.1	14.2	28.2
1/2	3/8	K8M6-VS	36.1	22.9	22.2	20.6	9.7	14.2	28.2
1/2	1/2	K8M8-VS	36.1	22.9	22.2	20.6	10.4	19.1	33.0
1/2	3/4	K8M12-VS	39.9	22.9	22.2	27.0	10.4	19.1	36.8
5/8	3/8	K10M6-VS	38.1	24.4	25.4	23.8	9.7	14.2	30.2
5/8	1/2	K10M8-VS	38.1	24.4	25.4	23.8	11.9	19.1	35.1
5/8	3/4	K10M12-VS	39.9	24.4	25.4	27.0	12.7	19.1	36.8
3/4	1/2	K12M8-VS	39.9	24.4	28.6	27.0	11.9	19.1	36.8
3/4	3/4	K12M12-VS	39.9	24.4	28.6	27.0	15.7	19.1	36.8
7/8	3/4	K14M12-VS	44.7	25.9	31.8	34.9	15.7	19.1	41.7
1	3/4	K16M12-VS	49.0	31.2	38.1	34.9	15.7	19.1	41.7
1	1	K16M16-VS	49.0	31.2	38.1	34.9	22.4	23.9	46.5
1 1/4	1 1/4	K20M20-VS	66.5	41.1	47.6	42.9	27.7	23.9	47.8
1 1/2	1 1/2	K24M24-VS	78.0	50.0	57.2	50.8	34.0	26.2	60.5


内螺纹转外螺纹两通接头



内螺纹转外螺纹两通接头

P-NPT 尺寸	Px-NPT 尺寸	基本订购信息	尺寸mm					工作压力 psig (bar)	
			L	F	B	Bx	E	316 不锈钢, 碳钢	黄铜
1/8	1/16	F2M1-US	27.7	14.3	10.4	9.7	3.0	6500 (447)	3200 (220)
1/8	1/8	F2M2-US	27.9	14.3	10.4	9.7	4.8	6500 (447)	3200 (220)
1/4	1/16	F4M1-US	30.5	19.1	15.0	9.7	3.0	6600 (454)	3300 (227)
1/4	1/8	F4M2-US	32.0	19.1	15.0	9.7	4.8	6600 (454)	3300 (227)
1/4	1/4	F4M4-US	35.6	19.1	15.0	14.2	7.1	6600 (454)	3300 (227)
3/8	1/16	F6M1-US	31.8	22.2	15.0	9.7	3.0	5300 (365)	2600 (179)
3/8	1/8	F6M2-US	33.8	22.2	15.0	9.7	4.8	5300 (365)	2600 (179)
3/8	1/4	F6M4-US	38.1	22.2	15.0	14.2	7.1	5300 (365)	2600 (179)
3/8	3/8	F6M6-US	38.4	22.2	15.0	14.2	9.7	5300 (365)	2600 (179)
1/2	1/8	F8M2-US	40.1	27.0	19.8	9.7	4.8	4900 (337)	2400 (165)
1/2	1/4	F8M4-US	44.7	27.0	19.8	14.2	7.1	4900 (337)	2400 (165)
1/2	3/8	F8M6-US	44.4	27.0	19.8	14.2	9.6	4900 (337)	2400 (165)
1/2	1/2	F8M8-US	49.3	27.0	19.8	19.1	11.9	4900 (337)	2400 (165)
3/4	1/8	F12M2-US	39.6	33.3	20.6	9.7	4.8	4600 (316)	2300 (158)
3/4	1/4	F12M4-US	47.0	33.3	20.6	14.2	7.1	4600 (316)	2300 (158)
3/4	3/8	F12M6-US	46.2	33.3	20.6	14.2	9.7	4600 (316)	2300 (158)
3/4	1/2	F12M8-US	51.3	33.3	20.6	19.1	11.9	4600 (316)	2300 (158)
3/4	3/4	F12M12-US	51.3	33.3	20.6	19.1	15.7	4600 (316)	2300 (158)
1	1/8	F16M2-US	46.0	41.3	25.4	9.7	4.8	4400 (303)	2200 (151)
1	1/4	F16M4-US	49.8	41.3	25.4	14.2	7.1	4400 (303)	2200 (151)
1	3/8	F16M6-US	50.8	41.3	25.4	14.2	9.7	4400 (303)	2200 (151)
1	1/2	F16M8-US	54.9	41.3	25.4	19.1	11.9	4400 (303)	2200 (151)
1	3/4	F16M12-US	55.1	41.3	25.4	19.1	15.7	4400 (303)	2200 (151)
1	1	F16M16-US	57.9	41.3	25.4	23.9	22.4	4400 (303)	2200 (151)
1 1/4	1	F20M16-US	62.7	54.0	25.4	23.9	22.4	5000 (344)	2500 (172)
1 1/4	1/4	F20M20-US	36.3	25.4	15.0	14.2	5.8	10000 (689)	/
1 1/2	1/2	F24M24-US	51.3	38.1	19.8	19.1	9.9	10000 (689)	/
1 1/2	1/4	F24M20-US	46.0	38.1	19.8	14.2	5.8	10000 (689)	/

外螺纹转内螺纹直通接头



外螺纹转内螺纹直通接头

P-NPT 尺寸	Px-NPT 尺寸	基本订购信息	尺寸mm					工作压力 psig (bar)	
			L	F	B	Bx	E	316 不锈钢, 碳钢	黄铜
1/8	1/16	M2F1-US	26.2	11.1	9.7	9.9	4.8	6500 (447)	3200 (220)
1/4	1/16	M4F1-US	21.8	14.3	14.2	9.9	4.8	8000 (551)	4000 (275)
1/4	1/8	M4F2-US	26.9	14.3	14.2	10.4	7.1	6500 (447)	3300 (227)
3/8	1/16	M6F1-US	21.8	17.5	14.2	9.9	4.8	13300 (971)	6600 (454)
3/8	1/8	M6F2-US	21.8	17.5	14.2	10.4	8.6	9200 (633)	4700 (323)
3/8	1/4	M6F4-US	30.2	19.1	14.2	15.0	9.6	6600 (454)	3300 (227)
1/2	1/8	M8F2-US	27.4	22.2	19.1	10.4	8.6	12200 (840)	6200 (427)
1/2	1/4	M8F4-US	27.4	22.2	19.1	15.0	11.4	8300 (571)	4400 (303)
1/2	3/8	M8F6-US	35.8	22.2	19.1	15.0	11.9	5300 (365)	2600 (179)
3/4	1/8	M12F2-US	27.4	27.0	19.1	10.4	7.1	20000(1378)	10000(689)
3/4	1/4	M12F4-US	27.4	27.0	19.1	15.0	11.4	12000 (826)	6000 (410)
3/4	3/8	M12F6-US	27.4	27.0	19.1	15.0	13.6	8200 (564)	4300 (296)
3/4	1/2	M12F8-US	41.4	27.0	19.1	19.8	15.7	4900 (337)	2400 (165)
1	1/8	M16F2-US	34.5	34.9	23.9	10.4	7.1	20000(1378)	10000(689)
1	1/4	M16F4-US	34.8	34.9	23.9	15.0	11.4	14500 (999)	7400 (509)
1	3/8	M16F6-US	34.8	34.9	23.9	15.0	13.6	11600 (799)	5900 (406)
1	1/2	M16F8-US	34.8	34.9	23.9	19.8	18.5	8600 (592)	4300 (296)
1	3/4	M16F12-US	47.0	34.9	23.9	20.6	22.4	5300 (365)	2600 (179)
1 1/4	3/4	M20F12-US	37.3	44.5	23.9	20.6	22.4	7800 (537)	3900 (268)
1 1/4	1	M20F16-US	37.3	44.5	23.9	25.4	28.1	3500 (241)	1750 (120)
1 1/2	1	M24F16-US	40.1	50.8	26.2	25.4	22.4	6600 (454)	3300 (227)
1 1/2	1 1/4	M24F20-US	56.0	54.0	26.2	25.4	34.0	5000 (344)	2500 (172)